

RISONIC *clamp-on*

Non-intrusive Ultrasonic Transit Time Flow Measurement



CASCADIA
INSTRUMENTATION INC.


Suite 383, 7360 -137 Street, Surrey BC V3W 1A3
Phone 778-578-7956 Fax 778-578-7986
Sales@Cascadia-Instrumentation.com
www.Cascadia-Instrumentation.com

Non-intrusive flow measurement for Water Supply, Hydro Power and Process Control
Permanent installations and mobile inspections
Magnetic frame for easy transducer mounting and positioning

rittmeyer
BRUGG


FEATURES AND BENEFITS

- Non-intrusive flow measurement (no drilling, no interruption of operation)
- Magnetic frame eliminates mounting straps and also works on partly exposed pipes
- Durable and long-term solution, option for adhesive mounting of magnetic frame
- Measuring accuracy of up to 1.5% of measured flow
- Flow measurement in both directions (pumped-storage power plant)
- Advanced mathematical calculations (total flow, integration of delta flow, etc.)
- Web server for easy configuration and remote diagnosis
- IEC 60870-5-104 and Modbus RTU/TCP communication
- Mobile metering with possibility for battery-powered operation

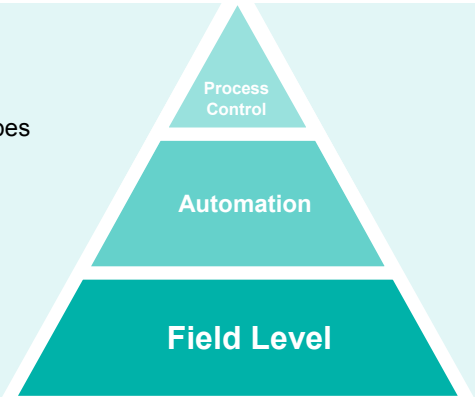


RISONIC clamp-on Application Examples

Flow monitoring in Water Supply systems

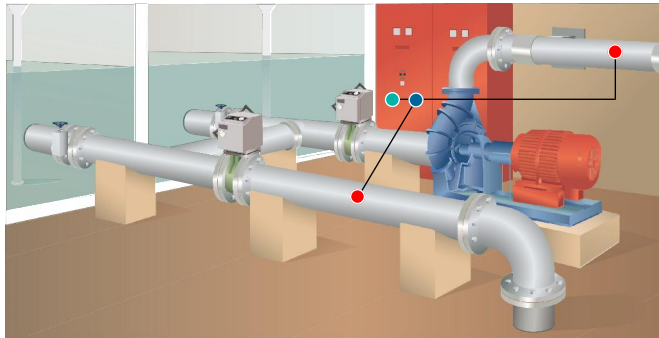


Penstock leakage detection

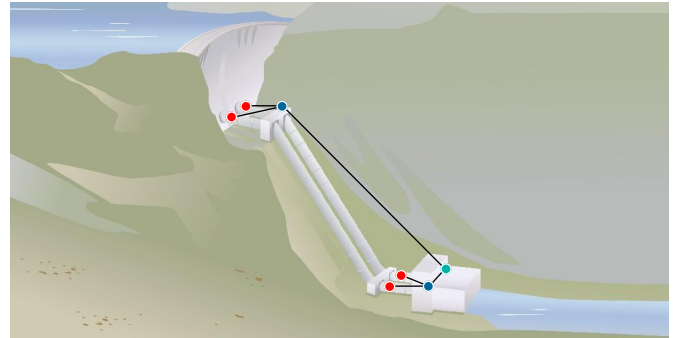

Ultrasonic Transit Time Flow Measurement

Clamp-on transducer	500 kHz, IP65
Water flow	0.5 ... 20 m/s
Accuracy (up to)	1.5% of measured flow
Pipe diameter	0.3 ... 3.0 m
Pipe wall thickness	8 ... 60 mm
Pipe material	metals, FRP, etc.
Measuring paths	1 or 2 paths per section
Measuring sections	max. 4

Path Arrangements and Pipe Diameters

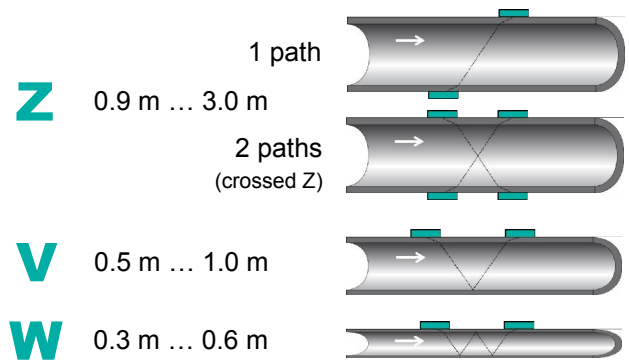


Innovative magnetic frame mounting concept



- Ideal for temporary metering
- Easy transducer positioning
- Magnetic holding of the sensor core piece (oscillator insert)
- Permanent mounting option
- May leave only frame at site for recurring flow inspections

Easy commissioning and signal monitoring

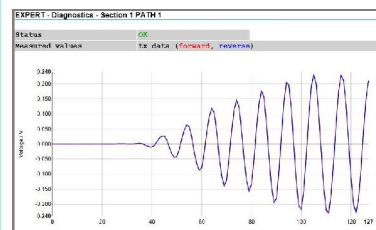

- Built-in signal-graph allows for immediate checking of measurement set-up
- Remotely monitor measuring section and signal quality

