



SMALLEST & LIGHTEST 5 GAS MONITOR

Gas Detection For Life

GX-3R Pro Model



5 World's Smallest and Lightest Gas Monitor

Features

- **Smallest & lightest 5 gas monitor**
 - 2.9" W x 2.6" H x 1.06" D , 4.58 ounces
- **Simultaneous detection of 5 gases**
 - Confined Space Gases: *LEL, O₂, H₂S, CO*
 - Toxic/IR Gases: *HCN, NO₂, SO₂, and CO₂*
 - H₂ Compensated CO sensor available
- **Simple 2-button operation**
- **Bluetooth communication with iOS & Android App**
- **Non-Compliance Indicator**
- **3 user adjustable alarm levels**
- **Panic Alarm**
- **Man Down Alarm**
- **Impact resistant body**
- **Large full dot, auto-backlit display with auto-rotation**
- **Stealth mode for law enforcement**
- **Field replaceable sensors & filters**
- **Water and dust resistant design, IP66/68**
- **3 Year Warranty**

Applications


- **Personal monitoring**
- **Confined spaces**
- **Refineries / petrochemical**
- **Utilities**
- **Oil and Gas**
- **Water / wastewater**
- **Fire services**
- **Construction**

The GX-3R Pro is the world's smallest 5-gas monitor weighing only 4.58 ounces and fits in the palm of your hand (2.9" W x 2.6" H x 1.06" D). It simultaneously monitors and displays 5 different gases. In addition to monitoring standard confined space gases, LEL, O₂, CO, & H₂S, the GX-3R Pro has a 5th channel where you can add infrared or toxic gas sensors. Two of the four sensor slots have interchangeable sensors providing flexible configurations, which can easily be changed in the field.

The GX-3R Pro comes equipped with Bluetooth wireless communication, man-down alarm, the choice of alkaline or rechargeable power supply, and a 3 year warranty. The Lithium-ion battery pack will operate for 25 hours and will fully charge in 3 hours.

The GX-3R Pro utilizes Bluetooth communication to display direct gas readings from the instrument to a phone app, which is available free on either iOS or Android phones. Automatic notifications can be programmed to send text or email messages if there is an alarm event from the GX-3R Pro.

Safety supervisors will appreciate the non-compliance indicator. The instrument flashes it's 3 LED lights every 30 seconds in the following conditions; if the instrument has not been bump tested, or if calibration is due, or if there was a gas alarm event. The 3 LED lights will continue to flash once every 30 seconds until the non-compliance condition has been resolved. The 30 second interval is adjustable.

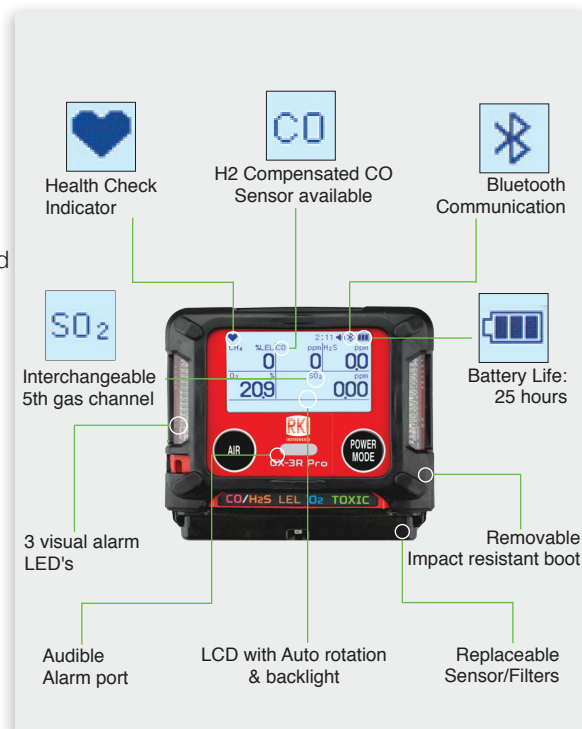

GX-3R Pro Model

Detectable Gases					Common Specifications													
Gas		Measuring Range (Increments)	Accuracy Statement	Preset Alarms	Sampling Method		Diffusion sampling standard (hand aspirator or clip-on motorized pump optional)											
Sensor Slot 1: Carbon Monoxide (CO) & Hydrogen sulfide (H2S) *Interchangeable					Display Full dot LCD with Autobacklight and Autorotation Alarm Types <table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing </td> <td> <ul style="list-style-type: none"> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm </td> </tr> <tr> <td> <ul style="list-style-type: none"> • Man Down Alarm • Panic Alarm </td> <td></td> </tr> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> <tr> <td> <ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration </td> <td> <ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message </td> </tr> </tbody> </table>				Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing 	<ul style="list-style-type: none"> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm 	<ul style="list-style-type: none"> • Man Down Alarm • Panic Alarm 		Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing 	<ul style="list-style-type: none"> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm 																	
<ul style="list-style-type: none"> • Man Down Alarm • Panic Alarm 																		
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 																	
H2S / CO	Dual EC	0 ~ 2000 ppm (1 ppm)	± 5% of reading or ± 5 ppm CO	A1: 25 ppm A2: 50 ppm A3: 1200 ppm TWA: 25 ppm STEL: 200 ppm														
		0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm A2: 30 ppm A3: 100 ppm TWA: 1.0 ppm STEL: 5.0 ppm														
H2S Only	EC	0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm A2: 30 ppm A3: 100 ppm TWA: 1.0 ppm STEL: 5.0 ppm														
CO H2 Compensated	EC	0 ~ 2,000 ppm	± 5% of reading or ± 2 ppm CO	A1: 25 ppm A2: 50 ppm A3: 1200 ppm TWA: 25 ppm STEL: 200 ppm														
Sensor Slot 2: Combustibles (Methane as standard)					Display of Alarm <table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration </td> <td> <ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message </td> </tr> </tbody> </table>				Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 						
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 																	
CH4 / HC	Catalytic	0 ~ LEL (1% LEL)	± 5% of reading or ± 2 % LEL	1st: 10% LEL 2nd: 25% LEL 3rd: 50% LEL Over: 100% LEL														
Sensor Slot 3: Oxygen (O2)					Operating Temp. & Humidity -20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment) -40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)													
O2	EC	0 ~ 40.0% Vol. (0.10%)	± 0.5% O2	Low 1: 19.5% Low 2: 18.0% High: 23.5% Over: 40.0%														
Sensor Slot 4: Toxic & CO2 *Interchangeable					Response Time Within 30 seconds (T90)													
HCN	EC	0 ~ 30.0 ppm (0.1 ppm)	± 10% of reading or ± 5 % of full scale	A1: 5.0 ppm A2: 10.0 ppm A3: 30.00 ppm TWA: 4.7 ppm STEL: 4.7 ppm														
NO2		0 ~ 20.00 ppm (0.05 ppm)		A1: 2.00 ppm A2: 4.00 ppm A3: 20.00 ppm TWA: 0.20 ppm STEL: 2.00 ppm														
SO2		0 ~ 100.0 ppm (0.05 ppm)		A1: 2 ppm A2: 5 ppm A3: 100 ppm TWA: 0.25 ppm STEL: 0.25ppm														
CO2 %	IR	0 ~ 10.0% Vol. (0.01%)	± 5% of reading or ± 2 ppm	A1: 0.50% Vol. A2: 3.00% Vol. A3: 4.00% Vol. TWA: 0.50% Vol. STEL: 3.00% Vol.														
CO2 ppm		0 ~ 10,000 ppm (20 ppm)		A1: 5,000 ppm A2: N/A TWA: N/A STEL: N/A														
					Power Source <table border="1"> <thead> <tr> <th>Config</th> <th>Li-ion</th> <th>Alkaline</th> </tr> </thead> <tbody> <tr> <td>4-gas + EC</td> <td>25 hours</td> <td>16 hours</td> </tr> <tr> <td>4-gas + IR</td> <td>16 hours</td> <td>7 hours</td> </tr> </tbody> </table>				Config	Li-ion	Alkaline	4-gas + EC	25 hours	16 hours	4-gas + IR	16 hours	7 hours	
Config	Li-ion	Alkaline																
4-gas + EC	25 hours	16 hours																
4-gas + IR	16 hours	7 hours																
					Dimension & Weight 2.9" W x 2.6" H x 1.06" D (Approx. 73 W x 65 H x 26 D mm), 4.58oz (with rubber boot)													
					Case Material Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft													
					Bluetooth Communication BLE: with iOS and Android phone app: <i>RK Link</i>													
					Datalogging Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends													
					Standard Accessories Alligator clip, protective rubber boot, charger, calibration adapter													
					Optional Accessories <ul style="list-style-type: none"> • Padded carrying case • RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available) • USB to IrDA downloading cable for datalogger • SDM-3R calibration station • Hand aspirator 													
					Safety Design / Approvals ATEX, CSA													
					Warranty Three years material and workmanship including sensors													

*Specifications subject to change without notice

Calibration Station
SDM-3R



Clip-On Sampling Pump
RP-3R



INSTRUMENTS
Gas Detection For Life

(800) 754-5165

www.rkiinstruments.com

Authorized Distributor:



Suite 383, 7360 -137 Street, Surrey BC V3W 1A3

Phone 778-578-7956 Fax 778-578-7986

Sales@Cascadia-Instrumentation.com

www.Cascadia-Instrumentation.com